



MIFAB®



www.mifab.com

C-PORT - 2012

Go to www.mifab.com for the most current product specification sheets.



Environmentally Friendly
made from 100% recycled tires

C-PORT Rubber Supports List Price Guide

TABLE OF CONTENTS

CXM & C5 (Small supports).....1
 CXP (Supports without strut).....1
 C (Standard supports without strut).....2
 C5 & C6 (Supports with 1 5/8" high strut).....2
 CXW (Widebody support without strut).....3
 CW (Widebody support with strut).....3
 CGW (Widebody support with strut and gasket).....4
 CE (Extension support, regular base).....5
 CEW (Extension support, widebody base).....5
 CRM (Roller series, mini support).....6
 CR (Roller series, regular support).....6
 CRE (Roller series, extended, regular support).....7
 CREW (Roller series, extended, widebody support).....7
 CB (Bridge support).....8
 CES (Bridge support, medium load).....8
 CESHW (Bridge support, widebody).....9
 CESW (Bridge support, widebody, medium load).....9
 DSA10 (Duct support, regular base).....10
 DSAW (Duct support, widebody base).....10
 CS (Vari-angle support).....11
 CSE (Copper Tube and Steel Support).....12
 CZ (Seismic support).....11
 AP (HVAC support, strips).....12
 CC (Copper piping support).....13
 CP (Platform support).....13
 Load Bearing Chart.....14
 Cross Reference.....15,16
 Cush-A-Clamp and Pipe Strap Clamps.....16
 Terms and Warranties.....17

There are 280 million waste tires produced in the USA each year.



By using 100% recycled rubber C-PORT products, you can help our world move toward a more sustainable future.

KEY FEATURES AND BENEFITS

Features include:

- **100% Recycled Rubber**
- **Compatible with most rooftop materials**
- **Dampens vibrations**
- **No need for supplemental rubber pad**
- **Will not float**
- **Will not deteriorate**
- **Extensive product line for all of your rooftop needs**



Environmentally Friendly
 made from **100% recycled**
 tires


Our product line has systems to support the following:

- **Pipe supports**
- **HVAC supports**
- **Roof Walkway supports**
- **Duct supports**
- **Conduit supports**
- **Air Conditioning supports**
- **Underfloor applications**
- **Solar Racking**



MIFAB's factory in Chicago, Illinois

CXM & C5 - SMALL RUBBER SUPPORT SERIES



C5 illustrated

Specification:

Dimensions - see chart

Material

Base - 100% recycled rubber, UV resistant
 Strut (on C5) - 14 gauge galvanized steel
 (1 5/8" wide x 7/8" tall)

Maximum Load


CXM - 150 lbs.
 C5 - 300 lbs.




**Environmentally Friendly
 made from 100% recycled
 tires**



Function: The CXM and C5 Series provide an economic alternative. They are perfect for supporting conduit or smaller pipe.

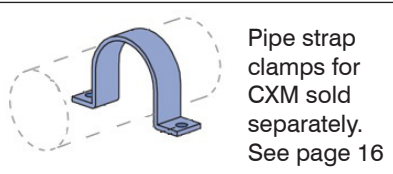

Pipe strap clamps for CXM sold separately. See page 16



Cush-A-Clamps for C5 sold separately. See page 16

CXM illustrated. See page 16 for pipe clamps sold separately.

MODEL #	OVERALL HEIGHT (H1)*	BASE HEIGHT (H2)**	WIDTH (W)	LENGTH (L)	WEIGHT	LIST PRICE
CXM	4" (102)	-	6" (152)	4 1/2" (114)	2.60 lbs.	\$9.95
C5	4 7/8" (124)	4" (102)	6" (152)	5" (127)	3.32 lbs.	\$13.50

*H1 - Overall height is from bottom of rubber support to top of the strut

**H2 - Base height is from bottom of rubber support to top of the rubber support

CXP - RUBBER SUPPORT SERIES

Specification:

Dimensions - see chart

Material

Base - 100% recycled rubber, UV resistant

Maximum Load


CXP - 500 lbs.
 CXP-2 - 800 lbs.



**Environmentally Friendly
 made from 100% recycled
 tires**



Function: The CXP Series supports provide an economic alternative. They are ideal for supporting conduit or pipe. Strut and clamps by others.

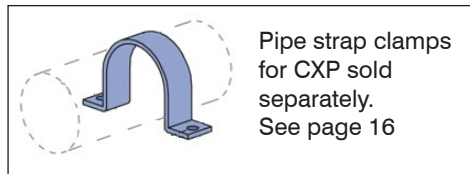

Pipe strap clamps for CXP sold separately. See page 16

CXP illustrated. See page 16 for pipe clamps sold separately.

MODEL #	HEIGHT (H)	WIDTH (W)	LENGTH (L)	WEIGHT	LIST PRICE
CXP	4" (102)	6" (152)	9.6" (244)	4.56 lbs.	\$17.50
CXP-2	4" (102)	6" (152)	22" (559)	10.84 lbs.	\$41.75

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

MIFAB, Inc., 1321 West 119th Street, Chicago, Illinois 60643-5109, USA

All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.

Toll Free: 1-800-465-2736, Fax: 1-773-341-3049
 sales@mifab.com Canada Toll Free: 1-800-387-3880

C - RUBBER SUPPORT SERIES WITH 7/8" GALVANIZED STEEL CHANNEL

Specification:

Base with 14 gauge Galvanized Channel (13/16" high)

Dimensions - 4 7/8" High x 6" Wide x 9.6" to 48" Length (See Chart)

Material - 100% recycled rubber, UV resistant

Maximum Load - 750 lbs. - for each 9.6" long support


Function: C Series channel support is designed for superior support of gas and refrigeration piping systems, cable tray, electrical conduit, multiple lines, HVAC equipment and many other applications. It is UV resistant and suitable for installation on most types of roofing material or other flat surfaces. Can be used as a curb (sleeper) replacement.



Environmentally Friendly
made from 100% recycled
tires



Note: C10 illustrated

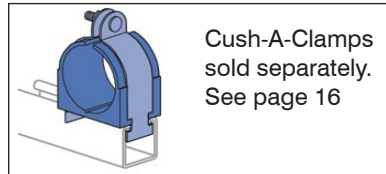

Cush-A-Clamps
sold separately.
See page 16



Note: C10 illustrated. See page 16
for pipe clamps sold separately.

MODEL #	OVERALL HEIGHT (H1)*	HEIGHT (H2)**	WIDTH (W)	LENGTH (L)	WEIGHT	LIST PRICE
C10	4 7/8" (124)	4" (102)	6" (152)	9.6" (244)	5.30 lbs.	\$21.00
C20	4 7/8" (124)	4" (102)	6" (152)	19.2" (488)	11.23 lbs.	\$48.25
C30	4 7/8" (124)	4" (102)	6" (152)	28.8" (732)	16.31 lbs.	\$77.00
C40	4 7/8" (124)	4" (102)	6" (152)	38.5" (978)	21.72 lbs.	\$102.00
C48	4 7/8" (124)	4" (102)	6" (152)	48" (1219)	27.12 lbs.	\$156.25

*H1 - Overall height is from bottom of rubber support to top of the strut

**H2 - Base height is from bottom of rubber support to top of the rubber support

C5 & C6 - RUBBER SUPPORT SERIES WITH 1 5/8" GALVANIZED STEEL CHANNEL

Specification:

Dimensions

C510 - 5 5/8" Height x 6" Width x 9.6" Length

C610 to C640 - 6 1/8" Height x 6" Width x 9.6" to 38.5" Length

Material

Base - 100% recycled rubber, UV resistant


Channel - 14 gauge galvanized steel (1 5/8" wide x 1 5/8" high)

Maximum Load - 750 lbs. - for each 9.6" long support


Function: The C5 Series and C6 Series are designed for superior support of gas and refrigeration piping systems, cable tray, electrical conduit, multiple lines, HVAC equipment and many other applications. Both series provide additional height, beyond the capability of the original C Series. The C6 Series is applicable where building codes require pipes to be at least 6" above the roof surface.



Environmentally Friendly
made from 100% recycled
tires

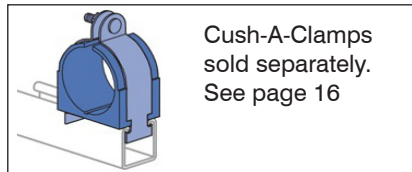

Cush-A-Clamps
sold separately.
See page 16

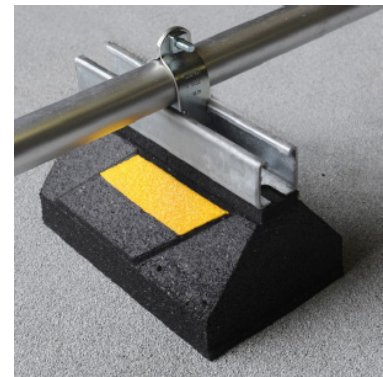

Note: C610 illustrated. See page 16
for pipe clamps sold separately.

MODEL #	OVERALL HEIGHT (H1)*	HEIGHT (H2)**	WIDTH (W)	LENGTH (L)	WEIGHT	LIST PRICE
C510	5 5/8" (143)	4" (102)	6" (152)	9.6" (244)	6.25 lbs.	\$36.00
C610	6 1/8" (156)	4.50" (114)	6" (152)	9.6" (244)	6.67 lbs.	\$32.50
C620	6 1/8" (156)	4.50" (114)	6" (152)	19.2" (488)	13.34 lbs.	\$62.50
C630	6 1/8" (156)	4.50" (114)	6" (152)	28.8" (732)	20.01 lbs.	\$92.75
C640	6 1/8" (156)	4.50" (114)	6" (152)	38.5" (978)	26.68 lbs.	\$123.25

*H1 - Overall height is from bottom of rubber support to top of the strut

**H2 - Base height is from bottom of rubber support to top of the rubber support

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

MIFAB, Inc., 1321 West 119th Street, Chicago, Illinois 60643-5109, USA

All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.

Toll Free: 1-800-465-2736, Fax: 1-773-341-3049
sales@mifab.com Canada Toll Free: 1-800-387-3880

CXW - WIDEBODY RUBBER SUPPORT

Specification:

Dimensions - 2.50" Height x 12" Width x Length as specified in chart

Material

Base - 100% recycled rubber, UV resistant

Maximum Load - 1,200 lbs. - for each 12" long support


Function: The CXW Series is designed for superior support of gas and refrigeration piping systems, cable tray, electrical conduit, multiple lines, HVAC equipment and many other applications. The wide body of the base gives this support series superior stability and load bearing capability. It is suitable for most types of roofing material or other flat surfaces. Strut and clamps by others.



Environmentally Friendly
made from 100% recycled
tires



Note: CXW12 illustrated



Pipe strap clamps
sold separately.
See page 16

MODEL #	HEIGHT (H)	WIDTH (W)	LENGTH (L)	WEIGHT	LIST PRICE
CXW12	2.5" (63)	12" (305)	12" (305)	9.56 lbs.	\$34.75
CXW24	2.5" (63)	12" (305)	24" (610)	19.12 lbs.	\$69.50
CXW36	2.5" (63)	12" (305)	36" (914)	28.68 lbs.	\$104.25

CW - WIDEBODY SERIES WITH 1 5/8" x 13/16" GALVANIZED CHANNEL

Specification:

Dimensions - 3.3125" Height x 12" Width x Length as specified in chart

Material

Base - 100% recycled rubber, UV resistant


Strut - 14 gauge galvanized steel

Maximum Load - 1,200 lbs. - for each 12" long support


Function: The CW Series is designed for superior support of gas and refrigeration piping systems, cable tray, electrical conduit, multiple lines, HVAC equipment and many other applications. The wide body of the base gives this support series superior stability and load-bearing capability. It is suitable for most types of roofing material or other flat surfaces.



Environmentally Friendly
made from 100% recycled
tires

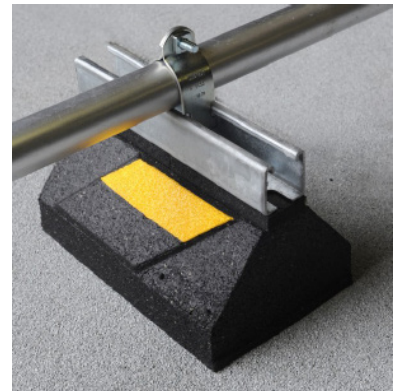

Note: CW12 illustrated. See page 16 for pipe clamps sold separately.



Cush-A-Clamps
sold separately.
See page 16

MODEL #	OVERALL HEIGHT (H1)*	HEIGHT (H2)**	WIDTH (W)	LENGTH (L)	WEIGHT	LIST PRICE
CW12	3.3125" (84)	2.50" (63)	12" (305)	12" (305)	9.5 lbs.	\$43.25
CW24	3.3125" (84)	2.50" (63)	12" (305)	24" (610)	19.0 lbs.	\$86.50
CW36	3.3125" (84)	2.50" (63)	12" (305)	36" (914)	28.5 lbs.	\$129.75
CW48	3.3125" (84)	2.50" (63)	12" (305)	48" (1219)	38.0 lbs.	\$173.00
CW60	3.3125" (84)	2.50" (63)	12" (305)	60" (1524)	47.5 lbs.	\$216.00
CW72	3.3125" (84)	2.50" (63)	12" (305)	72" (1829)	57.0 lbs.	\$259.25

*H1 - Overall height is from bottom of rubber support to top of the strut

**H2 - Base height is from bottom of rubber support to top of the rubber support

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

MIFAB, Inc., 1321 West 119th Street, Chicago, Illinois 60643-5109, USA

All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.

Toll Free: 1-800-465-2736, Fax: 1-773-341-3049
sales@mifab.com Canada Toll Free: 1-800-387-3880

CGW - WIDEBODY GASKET SERIES

Specification:

Dimensions

3.3125" Height x 12" Width x Length as specified in chart

Gasket - 24" Wide x Length as specified in chart

Material

Base - 100% recycled rubber, UV resistant


Strut - 14 gauge galvanized steel

Maximum Load - 1,200 lbs. - for each 12" long support




Environmentally Friendly
 made from 100% recycled tires

Function: The CGW Series channel support is designed for superior support of gas and refrigeration piping systems, cable trays, electrical conduit, multiple lines, HVAC equipment and many other applications. The wide body of the base gives this support series superior stability and load-bearing capacity. The Gasket Series can be glued down to the roof, and the gasket provides an extra protective barrier between the rubber base and roof surface.

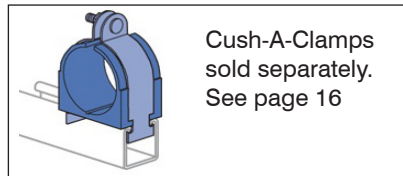

Cush-A-Clamps
 sold separately.
 See page 16

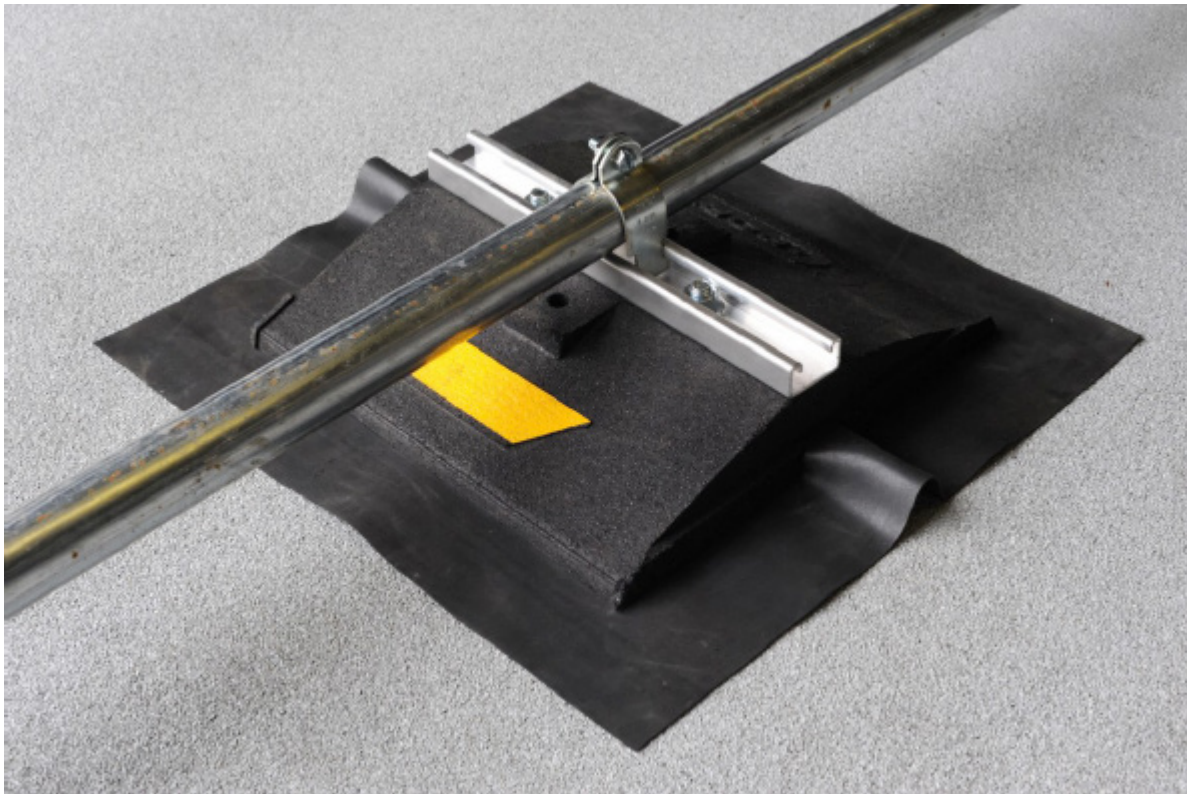

Note: CGW12 illustrated. See page 16 for pipe clamps sold separately.

MODEL #	OVERALL HEIGHT (H1)*	HEIGHT (H2)**	C-PORT WIDTH (W)	C-PORT LENGTH (L)	WIDTH (W) (with gasket)	LENGTH (L) (with gasket)	WEIGHT	LIST PRICE
CGW12	3.3125" (84)	2.50" (63)	12" (305)	12" (305)	18" (457)	18" (457)	9.5 lbs.	\$67.50
CGW24	3.3125" (84)	2.50" (63)	12" (305)	24" (610)	18" (457)	36" (914)	19.0 lbs.	\$135.00
CGW36	3.3125" (84)	2.50" (63)	12" (305)	36" (914)	18" (457)	54" (1372)	28.5 lbs.	\$202.50
CGW48	3.3125" (84)	2.50" (63)	12" (305)	48" (1219)	18" (457)	72" (1829)	38.0 lbs.	\$270.00

*H1 - Overall height is from bottom of rubber support to top of the strut

**H2 - Base height is from bottom of rubber support to top of the rubber support

Channel also available in corrosion resistant stainless steel or aluminum.

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

MIFAB, Inc., 1321 West 119th Street, Chicago, Illinois 60643-5109, USA

All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.

Toll Free: 1-800-465-2736, Fax: 1-773-341-3049
 sales@mifab.com Canada Toll Free: 1-800-387-3880

CE - EXTENSION SERIES

Specification:

Dimensions

Base - 4" Height x 6" Width x 9.6" Length

Overall height as specified in chart

Material

Base - 100% recycled rubber, UV resistant

Strut - 14 gauge galvanized steel (1 5/8" wide x 7/8" tall)


Rod - Two 1/2" electro zinc plated all threaded rod risers

Maximum Load - 400 lbs.

Function: The CE Series is designed for extended support of gas and refrigeration piping systems, cable tray, electrical conduit, multiple lines, HVAC equipment and many other applications. It is suitable for most types of roofing material or other flat surfaces.

Installation Instructions: The rubber bases can be directly placed on the roof surface. Adjust the crossbeam by loosening the nuts and adjust the strut to desired height and re-tighten nuts. Space the bases according to local plumbing/gas code.

A wide range of pipe clamps and straps can be used with this support.



Cush-A-Clamps sold separately. See page 16



Environmentally Friendly
made from 100% recycled tires



Note: CE10-8 illustrated. See page 16 for pipe clamps sold separately.

MODEL #	HEIGHT (H)	WIDTH (W)	LENGTH (L)	WEIGHT	LIST PRICE
CE10-8	8" (203)	6" (152)	9.6" (244)	6.14 lbs.	\$34.00
CE10-12	12" (305)	6" (152)	9.6" (244)	6.50 lbs.	\$42.00

Channel also available in corrosion resistant stainless steel or aluminum.

CEW - WIDEBODY EXTENSION SERIES

Specification:

Dimensions

Base - 2 1/2" Height x 12" Width x 12" Length

Overall height as specified in chart

Material

Base - 100% recycled rubber, UV resistant


Strut - 14 gauge galvanized steel (1 5/8" wide x 7/8" tall)

Rod - Two 1/2" electro zinc plated all threaded rod risers

Maximum Load - 800 lbs.

Function: The CEW Series is designed for extended support of gas and refrigeration piping systems, cable tray, electrical conduit, multiple lines, HVAC equipment and many other applications. The wide-bodied base provides additional stability. It is suitable for most types of roofing material or other flat surfaces.


Installation Instructions: The rubber bases can be directly placed on the roof surface. Adjust the crossbeam by loosening the nuts and adjust the strut to desired height and re-tighten nuts. Space the bases according to local plumbing/gas code.



Cush-A-Clamps sold separately. See page 16



Environmentally Friendly
made from 100% recycled tires

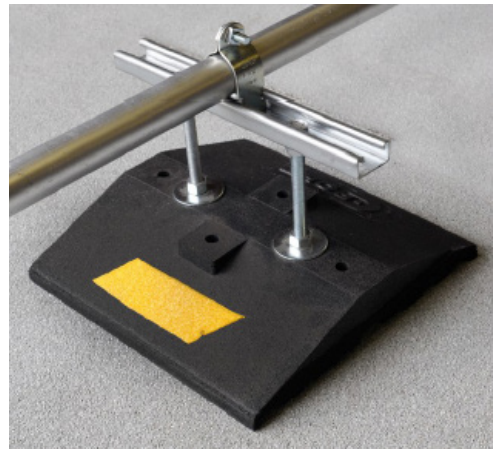

Note: CEW12-8 illustrated. See page 16 for pipe clamps sold separately.

MODEL #	HEIGHT (H)	WIDTH (W)	LENGTH (L)	WEIGHT	LIST PRICE
CEW12-8	8" (203)	12" (305)	12" (305)	10.50 lbs.	\$55.50
CEW12-12	12" (305)	12" (305)	12" (305)	10.90 lbs.	\$57.75
CEW12-16	16" (406)	12" (305)	12" (305)	11.20 lbs.	\$60.75

Channel also available in corrosion resistant stainless steel or aluminum.

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

MIFAB, Inc., 1321 West 119th Street, Chicago, Illinois 60643-5109, USA

All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.

Toll Free: 1-800-465-2736, Fax: 1-773-341-3049
 sales@mifab.com Canada Toll Free: 1-800-387-3880

CRM - ROLLER SERIES, SMALL BASE

Specification:

Material

Base - 100% recycled rubber, UV resistant

Roller - rubber

Maximum Load - 300 lbs.

Function: The CRM Series is designed for superior support of gas and refrigeration pipes at a higher elevation from the roof surface. The roller allows for longitudinal movements of the pipe. The CRM provides a less expensive alternative to the larger roller series products. It is suitable for most types of roofing material or other flat surfaces, and is ideal for smaller pipes. The roller bracket has roller mounting holes 1" apart so that the roller can be adjusted from 5 3/4" to 6 3/4" from the centerline to the ground.



Environmentally Friendly
 made from 100% recycled
 tires



MODEL #	PIPE SIZE (OD)	OVERALL HEIGHT (H) TO ROLLER CENTRE	WIDTH (W)	LENGTH (L)	WEIGHT	LIST PRICE
CE10-8	Up to 3" Pipe	5.75" (146)	6" (152)	4.5" (114)	3.80 lbs.	\$30.25

CR - ROLLER SERIES, REGULAR BASE

Specification:

Dimensions

Base - Width of 6" x Length of 9.6"

Roller Width - 3", 4", or 6" rollers are available (See Chart)

Total Height to Roller Centre - ranges from 5.75" to 6.5" (See Chart)

Material

Base - 100% recycled rubber, UV resistant


Roller - rubber (cast iron galvanized rollers for 6" pipe are also available)

Maximum Load - 500 lbs.

Function: The CR Series is designed for superior support of gas and refrigeration pipes. The roller allows for longitudinal movements of the pipe. This support is suitable for most types of roofing material or other flat surfaces. The roller bracket has roller mounting holes 1" apart so that the roller can be adjusted from 6 1/2" to 7 1/2" from the centerline to the ground.



Environmentally Friendly
 made from 100% recycled
 tires

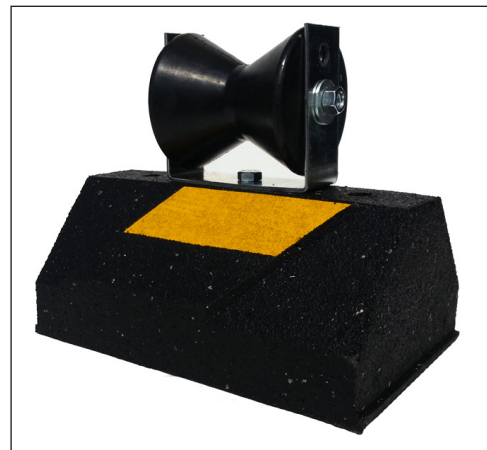

Note: CR10-4 illustrated

MODEL #	PIPE SIZE (OD)	OVERALL HEIGHT (H) TO ROLLER CENTRE	WIDTH (W)	LENGTH (L)	WEIGHT	LIST PRICE
CR10-3	Up to 3" Pipe	6.5" (185)	6" (152)	9.6" (244)	6.10 lbs.	\$40.50
CR10-4	Up to 4" Pipe	6.5" (185)	6" (152)	9.6" (244)	6.44 lbs.	\$42.00

Also available with a 3" or 4" rubber roller, or a 6" cast iron galvanized roller.

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

MIFAB, Inc., 1321 West 119th Street, Chicago, Illinois 60643-5109, USA

All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.

Toll Free: 1-800-465-2736, Fax: 1-773-341-3049
 sales@mifab.com Canada Toll Free: 1-800-387-3880

CRE - EXTENDED ROLLER SERIES, REGULAR BASE

Specification:

Dimensions

Base - Width of 6" x Length of 9.6"
 Roller Width - 3", 4", or 6" rollers are available (See Chart)
 Total Height to Roller Centre - ranges from 8" to 12" (See Chart)

Material

Base - 100% recycled rubber, UV resistant
 Roller - rubber (cast iron galvanized rollers for 6" pipe are also available)
 Extending Rods and Horizontal Rod - 1/2" electro zinc plated all threaded rod risers

Maximum Load - 300 lbs.

Function: The CRE Series is designed for superior support of gas and refrigeration pipes at a higher elevation from the roof surface. The roller allows for longitudinal movements of the pipe. This support is suitable for most types of roofing material or other flat surfaces.



Environmentally Friendly
 made from 100% recycled tires



Note: CRE10-8-3 illustrated

MODEL #	PIPE SIZE (OD)	OVERALL HEIGHT (H)			WEIGHT	LIST PRICE
		TO ROLLER CENTRE	WIDTH (W)	LENGTH (L)		
CRE10-8-3	Up to 3" Pipe	8" (203)	6" (152)	9.6" (244)	6.70 lbs.	\$56.50
CRE10-8-4	3" to 4" Pipe	8" (203)	6" (152)	9.6" (244)	7.45 lbs.	\$58.50
CRE10-12-3	Up to 3" Pipe	12" (305)	6" (152)	9.6" (244)	7.10 lbs.	\$59.00

Also available with a 3" or 4" rubber roller, or a 6" cast iron galvanized roller (except for CRM).

CREW - EXTENDED ROLLER SERIES, WIDEBODY BASE

Specification:

Dimensions

Base - 12" Width x 12" Length
 Roller Width - 3", 4", or 6" (See Chart)
 Total Height to Roller Centre - 12" or 16" (See Chart)

Material

Base - 100% recycled rubber, UV resistant
 Roller - rubber (cast iron galvanized rollers for 6" pipe are also available)
 The extending rods, as well as the horizontal rod that the roller rests on, are all 1/2" electro zinc plated all threaded rod risers
 Maximum Load - 500 lbs.

Function: The CREW Series support is designed for superior support of gas and refrigeration pipes. The roller allows for longitudinal movements of the pipe. The wide-bodied base provides additional stability and load-bearing capacity. This support is suitable for most types of roofing material or other flat surfaces.



Environmentally Friendly
 made from 100% recycled tires



Note: CREW12-12-3 illustrated

MODEL #	PIPE SIZE (OD)	OVERALL HEIGHT (H)			WEIGHT	LIST PRICE
		TO ROLLER CENTRE	WIDTH (W)	LENGTH (L)		
CREW12-12-3	Up to 3"	12" (305)	12" (305)	12" (305)	11.3 lbs.	\$77.50
CREW12-12-4	3" to 4"	12" (305)	12" (305)	12" (305)	11.5 lbs.	\$79.25
CREW12-12-6	4" to 6"	12" (305)	12" (305)	12" (305)	13.0 lbs.	\$94.75
CREW12-16-3	Up to 3"	16" (406)	12" (305)	12" (305)	11.5 lbs.	\$80.25
CREW12-16-4	3" to 4"	16" (406)	12" (305)	12" (305)	11.7 lbs.	\$82.00
CREW12-16-6	4" to 6"	16" (406)	12" (305)	12" (305)	13.5 lbs.	\$101.75

Also available with a 3" or 4" rubber roller, or a 6" cast iron galvanized roller.

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

MIFAB, Inc., 1321 West 119th Street, Chicago, Illinois 60643-5109, USA

All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.

Toll Free: 1-800-465-2736, Fax: 1-773-341-3049
sales@mifab.com Canada Toll Free: 1-800-387-3880

CB - BRIDGE SUPPORT SERIES w/ TWO CX SERIES SUPPORTS AND 1 5/8" GALVANIZED CHANNEL


Specification:

Two (2) Bases Bridged with 12 gauge Galvanized Channel (1 5/8" high)
Dimensions - 5 5/8" High x 6" Wide x Bridge Length (Overall Length)
Material - 100% recycled rubber, UV resistant
Load Rating - Each base rated at 500 lbs. Refer to beam load of channel at various lengths as other factor (see Strut catalog)



**Environmentally Friendly
made from 100% recycled
tires**

Function: CB Bridge channel is designed as a superior sleeper for HVAC equipment, cable tray, roof walkway systems, refrigeration equipment and many other applications. It is UV resistant and suitable for installation on most types of roofing material or other flat surfaces.

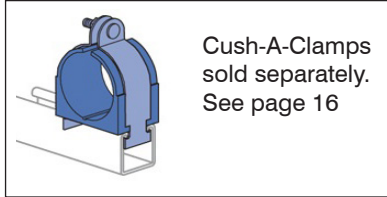

Note: See page 16 for pipe clamps sold separately.

OVERALL						
MODEL #	HEIGHT (H1)*	HEIGHT (H2)**	CURB LENGTH (L)	STRUT LENGTH (L)	WEIGHT	LIST PRICE
CB10-28	5 5/8" (143)	4" (102)	9.6" (244)	28" (711)	13.59 lbs.	\$60.50
CB10-36	5 5/8" (143)	4" (102)	9.6" (244)	36" (914)	14.88 lbs.	\$66.50
CB10-42	5 5/8" (143)	4" (102)	9.6" (244)	42" (1067)	15.66 lbs.	\$69.50
CB10-50	5 5/8" (143)	4" (102)	9.6" (244)	50" (1270)	17.24 lbs.	\$73.25
CB10-60	5 5/8" (143)	4" (102)	9.6" (244)	60" (1524)	18.79 lbs.	\$79.25

*H1 - Overall height is from bottom of rubber support to top of the strut
 **H2 - Base height is from bottom of rubber support to top of the rubber support
 Channel also available in corrosion resistant stainless steel or aluminum.

CES - MEDIUM LOAD SERIES



Specification:

Dimensions - 10" High x 9.6" Base Length x 12" to 24" Crossbeam Width (See Chart)
Material
 Base - 100% recycled rubber, UV resistant
 Crossbeam and Uprights - 1 5/8" x 1 5/8", 12 gauge galvanized steel strut
Maximum Load - 500 lbs.



**Environmentally Friendly
made from 100% recycled
tires**

Function: The CES Series can support gas and refrigeration piping systems, cable tray, electrical conduit, multiple lines, HVAC equipment and many other applications. It is designed for rooftop applications requiring a heavier load bearing, and is suitable for most types of roofing material or other flat surfaces.

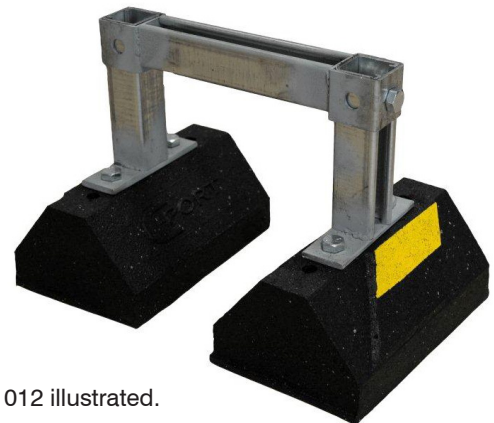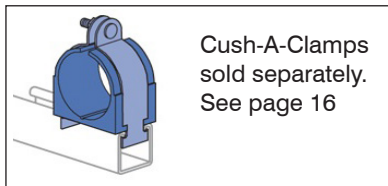

Note: CES10-1012 illustrated.

CROSSBEAM						
MODEL #	HEIGHT (H)	WIDTH	BASE WIDTH	BASE LENGTH	WEIGHT	LIST PRICE
CES10-1012	10" (254)	12" (305)	6" (152)	9.6" (244)	14.21 lbs.	\$131.00
CES10-1024	10" (254)	24" (610)	6" (152)	9.6" (244)	15.62 lbs.	\$142.25

Channel also available in corrosion resistant stainless steel or aluminum.

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

MIFAB, Inc., 1321 West 119th Street, Chicago, Illinois 60643-5109, USA

All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.

Toll Free: 1-800-465-2736, Fax: 1-773-341-3049
 sales@mifab.com Canada Toll Free: 1-800-387-3880

CESW - WIDEBODY, MEDIUM LOAD SERIES

Specification:

Dimensions - 24" Crossbeam Width x 12" Base Length x 24" to 48" Height (See Chart)

Material

Base - 100% recycled rubber, UV resistant
 Crossbeam and Uprights - 1 5/8" x 1 5/8", 12 gauge galvanized steel strut

Maximum Load - 600 lbs.

Function: The CESW Series can support gas and refrigeration piping systems, cable tray, electrical conduit, multiple lines, HVAC equipment and many other applications. It is designed for rooftop applications requiring a heavier load bearing, and is suitable for most types of roofing material or other flat surfaces. The wide bases provide this series with added stability. The CESW Series is suitable for use with one or two pipe hangers (by others).



Environmentally Friendly
 made from 100% recycled tires



Note: CESW12-2424 illustrated. Pipe hangers by others.

MODEL #	HEIGHT (H)	CROSSBEAM		BASE WIDTH	BASE LENGTH	WEIGHT	LIST PRICE
		WIDTH	HEIGHT				
CESW12-2424	24" (610)	24" (610)	12" (305)	12" (305)	27.80 lbs.	\$247.75	
CESW12-3624	36" (914)	24" (610)	12" (305)	12" (305)	31.12 lbs.	\$263.25	
CESW12-4824	48" (1219)	24" (610)	12" (305)	12" (305)	34.44 lbs.	\$279.00	

Channel also available in corrosion resistant stainless steel or aluminum.

CESHW - WIDEBODY, HEAVY LOAD SERIES

Specification:

Dimensions

Base - 12" Width x 12" Length

Material

Rubber Base - 100% recycled rubber, UV resistant
 Base Strut - 14 gauge galvanized steel
 Crossbeam - 1 5/8" x 3 1/4", 12 gauge galvanized steel, back to back strut
 Upright - 1 5/8" x 1 5/8", 12 gauge galvanized steel strut

Maximum Load - 1,200 lbs.


Function: The CESHW Series can support gas and refrigeration piping systems, cable tray, electrical conduit, multiple lines, HVAC equipment and many other applications. It is designed for rooftop applications requiring a heavier load bearing, and is suitable for most types of roofing material or other flat surfaces.



Environmentally Friendly
 made from 100% recycled tires



Note: CESHW-1624 illustrated. See page 16 for pipe clamps sold separately.



Cush-A-Clamps
 sold separately.
 See page 16

MODEL #	HEIGHT (H)	WIDTH (W)	BASE HEIGHT	WEIGHT	LIST PRICE
			& WIDTH		
CESHW-1624	16" (406)	24" (610)	12" (305)	37 lbs.	\$308.25
CESHW-1636	16" (406)	36" (914)	12" (305)	39 lbs.	\$334.25

Channel also available in corrosion resistant stainless steel or aluminum.

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

MIFAB, Inc., 1321 West 119th Street, Chicago, Illinois 60643-5109, USA

All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.

Toll Free: 1-800-465-2736, Fax: 1-773-341-3049
 sales@mifab.com Canada Toll Free: 1-800-387-3880

DSA10 - DUCT SUPPORT SERIES

Specification:

Telescopic Crossbeam

Outer Piece Dimensions - 1 7/8" x 1 7/8"

Inner Piece Dimensions - 1 5/8" x 1 5/8"

Material - 12 gauge galvanized steel

Vari-Angle Bracket

Dimensions - 5 7/8" x 1 7/8"

Material - 1/4" Hot-rolled, zinc plated carbon steel

Base (DSA10)

Dimensions - 4" Height x 6" Width x 9.6" Length

Maximum Load - 800 lbs.

Material (both models) - 100% recycled rubber, UV resistant

Function: The DSA Series is designed specifically for ductwork. The telescopic crossbeam allows for easy size adjustments. The bases feature vari-angle supports to adapt to any roof pitch and are made of 100% recycled rubber. Narrower bases are used with the DSA10 Series.



Environmentally Friendly
made from 100% recycled
tires



Note: DSA10-1831 illustrated

MODEL #	WIDTH (W) MIN	WIDTH (W) MAX	BASE LENGTH (L)	WEIGHT	LIST PRICE
DSA10-1831	18" (457)	31" (787)	10" (254)	39.90 lbs.	\$221.25
DSA10-3157	31" (787)	57" (1448)	10" (254)	45.10 lbs.	\$251.00
DSA10-57102	57" (1448)	102" (2591)	10" (254)	50.10 lbs.	\$357.00

Note: Uprights are not included. Strut can be cut to suit job site.
Channel also available in corrosion resistant stainless steel or aluminum.

DSAW - WIDEBODY, DUCT SUPPORT SERIES

Specification:

Telescopic Crossbeam

Outer Piece Dimensions - 1 7/8" x 1 7/8"

Inner Piece Dimensions - 1 5/8" x 1 5/8"

Material - 12 gauge, galvanized steel

Vari-Angle Bracket

Dimensions - 5 7/8" x 1 7/8"

Material - 1/4" Hot-rolled, zinc plated carbon steel

Base (DSA10)

Dimensions - 2 1/4" Height x 12" Width x 12" Length

Maximum Load - 1,000 lbs.

Material (both models) - 100% recycled rubber, UV resistant

Function: The DSAW Series is designed specifically for ductwork. The telescopic crossbeam allows for easy size adjustments. The bases feature vari-angle supports to adapt to any roof pitch and are made of 100% recycled rubber. Wide bases are used with the DSAW Series.



Environmentally Friendly
made from 100% recycled
tires



Note: DSAW-1831 illustrated

MODEL #	WIDTH (W) MIN	WIDTH (W) MAX	BASE LENGTH (L)	WEIGHT	LIST PRICE
DSAW-1831	18" (457)	31" (787)	12" (305)	29.90 lbs.	\$242.75
DSAW-3157	31" (787)	57" (1448)	12" (305)	35.10 lbs.	\$292.75
DSAW-57102	57" (1448)	102" (2591)	12" (305)	40.10 lbs.	\$414.00

Note: Uprights are not included. Strut can be cut to suit job site.
Channel also available in corrosion resistant stainless steel or aluminum.

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

MIFAB, Inc., 1321 West 119th Street, Chicago, Illinois 60643-5109, USA

All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.

Toll Free: 1-800-465-2736, Fax: 1-773-341-3049
sales@mifab.com Canada Toll Free: 1-800-387-3880

CS - 1 5/8" STEEL CHANNEL SERIES w/ 6" ADJUSTABLE 1 7/8" x 1 7/8" SQUARE LEG

Specification:

Base with 12 gauge Galvanized Channel (1 5/8" high) and Adapter Leg
Dimensions - 5 5/8" High (not including height of adapter leg) x
 6" Wide x Length (Base Length)

Material - 100% recycled rubber, UV resistant

Adapter Fitting - 1 7/8" x 1 7/8" channel with 9/16" holes on all three (3) sides.

Maximum Load - 750 lbs. - for each 9.6" long support



Environmentally Friendly
 made from 100% recycled
 tires



Function: CS Vari-Angle support is variable angle support designed for ventilation duct, walkway systems, HVAC equipment and many other applications installed on sloped or uneven surfaces. Adapter leg will accommodate 1 5/8" x 1 5/8" steel strut for framing. It is UV resistant and suitable for installation on most types of roofing material and sloped surfaces.



Note: CS10 illustrated.

MODEL #	OVERALL HEIGHT (H1)*	HEIGHT (H2)**	WIDTH (W)	LENGTH (L)	WEIGHT	LIST PRICE
CS10	5 5/8" (143)	4" (102)	6" (152)	9.6" (244)	7.97 lbs.	\$58.25
CS20	5 5/8" (143)	4" (102)	6" (152)	22" (558)	15.07 lbs.	\$88.75
CS30	5 5/8" (143)	4" (102)	6" (152)	28.8" (732)	20.29 lbs.	\$111.25
CS40	5 5/8" (143)	4" (102)	6" (152)	38.5" (978)	26.43 lbs.	\$138.50
CS48	5 5/8" (143)	4" (102)	6" (152)	48" (1219)	32.60 lbs.	\$165.75

*H1 - Overall height is from bottom of rubber support to top of the strut

**H2 - Base height is from bottom of rubber support to top of the rubber support

Channel also available in corrosion resistant stainless steel or aluminum.

CZ - SEISMIC SERIES

Specification:

Dimensions - 4 7/8" High x 6" Wide x 9.6" to 38.5" Length (Base Length)

Materials

Base - 100% recycled rubber, UV resistant

Strut - 14 gauge Galvanized Channel

Rod - 1/2" electro zinc plated all threaded rod risers


Gasket - 3" x 3"

Maximum Load - 750 lbs. - for each 9.6" long support




Environmentally Friendly
 made from 100% recycled
 tires

Function: The CZ Seismic Series is designed for superior support of gas and refrigeration piping systems, cable tray, electrical conduit, multiple lines, HVAC equipment and many other applications. This is a penetrating support fastened to the structure under the membrane. It is ideally designed for hurricane resistance or seismic applications. It is suitable for most types of roofing material or other flat surfaces.



Cush-A-Clamps
 sold separately.
 See page 16

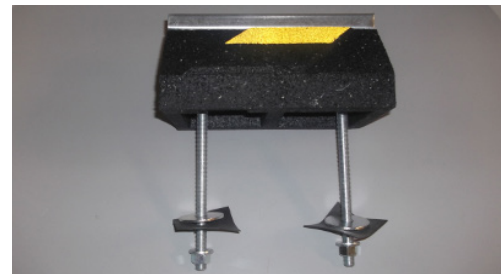

Note: CZ10 illustrated.

MODEL #	OVERALL HEIGHT (H1)*	HEIGHT (H2)**	WIDTH (W)	LENGTH (L)	WEIGHT	LIST PRICE
CZ10	4 7/8" (124)	4" (102)	6" (152)	9.6" (244)	5.90 lbs.	\$40.25
CZ20	4 7/8" (124)	4" (102)	6" (152)	19.2" (488)	11.83 lbs.	\$79.00
CZ30	4 7/8" (124)	4" (102)	6" (152)	28.8" (732)	16.91 lbs.	\$94.50
CZ40	4 7/8" (124)	4" (102)	6" (152)	38.5" (978)	22.32 lbs.	\$132.00

*H1 - Overall height is from bottom of rubber support to top of the strut

**H2 - Base height is from bottom of rubber support to top of the rubber support

Channel also available in corrosion resistant stainless steel or aluminum. Not seismic tested or approved.

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

MIFAB, Inc., 1321 West 119th Street, Chicago, Illinois 60643-5109, USA

All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.

Toll Free: 1-800-465-2736, Fax: 1-773-341-3049
 sales@mifab.com Canada Toll Free: 1-800-387-3880

AP - AIRPORT SUPPORT SYSTEM

Specification:

Dimensions - 2" High x 5" Wide x Length (Base Length)

Material

Base - 100% recycled rubber, UV resistant

Maximum Load - 500 lbs.


Function: The AP Series is designed to provide support for all electrical and HVAC equipment. Grooved recessed tray prevents movement and dampens vibration. Allows water passage; prevents growth of moss and mold. Lightweight. Consult roofing manufacturer or engineer for roof loading.



Environmentally Friendly
made from 100% recycled tires



AP36 illustrated

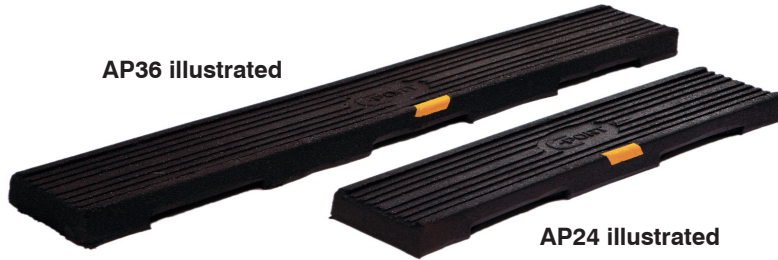

AP24 illustrated



AP6 illustrated

MODEL #	HEIGHT (H)	WIDTH (W)	LENGTH (L)	WEIGHT	LIST PRICE
AP6	2" (51)	5" (127)	5 1/2" (140)	2.20 lbs.	\$9.95
AP24	2" (51)	5" (127)	24" (610)	7.12 lbs.	\$25.25
AP36	2" (51)	5" (127)	36" (914)	12.14 lbs.	\$33.00

CSE - COPPER TUBE AND STEEL PIPE SUPPORT

Specification:

Base – Recycled rubber, UV resistant

Dimensions: 6" wide x 4" high x 4 1/2" long

Pipe Clamp Material: Malleable Iron. Specify clamp size – 1/2", 3/4", 1", 1 1/4", 1 1/2" and 2" pipe clamp sizes available. Order by Suffix -50, -75, -100, -125, -150 or -200.

Threaded Rod / Hardware: Electro Plated Steel

Maximum Load – 150 Lbs.



Environmentally Friendly
made from 100% recycled tires



MODEL #	HEIGHT (H) (to top of base)	WIDTH (W)	LENGTH (L)	WEIGHT	LIST PRICE
CSE5-10	4" (102)	6" (152)	4 1/2" (114)	3.00 lbs.	\$18.50

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

MIFAB, Inc., 1321 West 119th Street, Chicago, Illinois 60643-5109, USA

All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.

Toll Free: 1-800-465-2736, Fax: 1-773-341-3049
sales@mifab.com Canada Toll Free: 1-800-387-3880

CC - COPPER PIPING SUPPORT

Specification:

Base - Recycled rubber with 14 gauge Galvanized combination channel fitting. (1 5/8" x 1 5/8" strut welded to galvanized steel plate.)

Dimensions: 4" High x 6" Wide x 9.6" Long

Material: 100% recycled rubber, UV resistant

Maximum Load - 350 lbs.

Function: The CC Series is designed for support of copper piping on any roofing material or other flat surfaces. The channel will accept strut clamps (by others) for adjustable heights.



Environmentally Friendly
made from 100% recycled
tires



MODEL #	HEIGHT (H)	WIDTH (W)	LENGTH (L)	WEIGHT	LIST PRICE
CC10-18	18" (457)	6" (152)	9.6" (244)	9.25 lbs.	\$39.00

CP - PLATFORM SERIES

Specification:

Dimensions

Base - 2" High x 5" Wide x 36" Length

Platform: 24" Wide x 36" - 72" Length

Material

Base - 100% recycled rubber, UV resistant


Platform: Galvanized steel

Maximum Load - 600 lbs.

Function: The CP Series is designed as a non-penetrating lightweight to bring to level platform surface. It is used for air conditioning, air condensing units, HVAC, and other electrical units. Free-flow leg system allows water passage. Other features include: prohibits moss and mold growth, easy to install, easy movement brackets that are suitable for all types of equipment, and adjustable. Consult roofing manufacturer or engineer for roof loading.




Environmentally Friendly
made from 100% recycled
tires

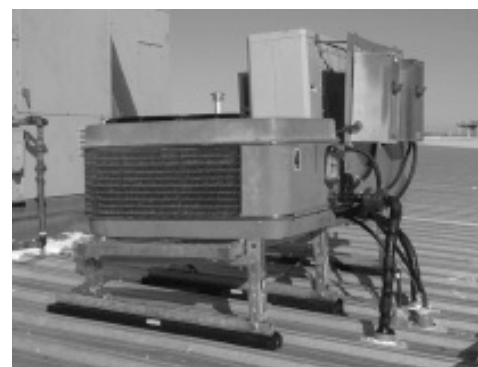


MODEL #	WIDTH (W)	LENGTH (L)	BASE LENGTH	QUANTITY	WEIGHT	LIST PRICE
CP36-2436	24" (610)	36" (914)	36" (914)	2	67.08 lbs.	\$616.00
CP36-2448	24" (610)	48" (1219)	36" (914)	2	70.92 lbs.	\$631.25
CP36-2472	24" (610)	72" (1829)	36" (914)	3	102.50 lbs.	\$905.25

C-PORT LOADING CHART (Lbs./inch²)

C Series	6" Wide Base with 1 5/8" x 1 5/8" Strut				
Base	C10	C20	C30	C40	C48
Total lbs./Base at 1 lb./in ²	30 lbs.	66 lbs.	87 lbs.	115 lbs.	144 lbs.

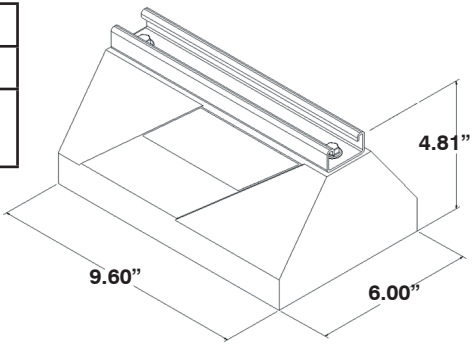

CW Series	12" Wide (Base) x (Length) with 1 5/8" x 1 5/8" Strut			
"L" Inches	12"	24"	36"	48"
Total lbs./Base at 1 lb./in ²	30 lbs.	66 lbs.	87 lbs.	115 lbs.

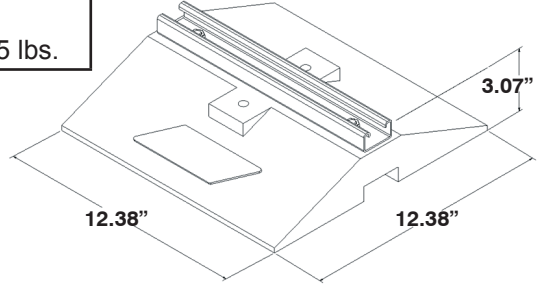

STEEL PIPE WEIGHT

Pipe Diameter (inches)	Gas Filled		Water Filled	
	Schedule 40	Schedule 80	Schedule 40	Schedule 80
	Weight lbs./Ft.	Weight lbs./Ft.	Weight lbs./Ft.	Weight lbs./Ft.
1	1.68	2.17	2.06	2.48
1 1/4	2.27	3	2.92	3.56
1 1/2	2.72	3.63	3.6	4.4
2	3.68	5.02	5.1	6.3
2 1/2	5.79	7.66	7.87	9.49
3	7.58	10.25	10.78	13.12
3 1/2	9.11	12.51	13.4	16.23
4	10.79	14.98	16.32	19.95
5	14.62	20.78	23.28	28.65
6	18.98	28.57	31.49	39.86
8	25.55	43.4	47.15	63.2
10	40.5	64.74	74.6	95.84
12	53.6	88.6	102.1	132.6
14	63.37	107	121.87	158.2
16	85	137	159.5	206.7
18	103	171	202.2	259.5
20	123	209	243.4	318.4
24	171	297	345.2	455.2

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

CX Series - Rubber Supports, Small Base (Page 1)			
C-PORT	Dura-Block (B-Line)	Miro	Erico
CXM	DBM	-	182365, 182370, 182375
CXP Series - Rubber Supports, Regular Base (Page 1)			
C-PORT	Dura-Block (B-Line)	Miro	Erico
CXP	DBP	RSS4	RPSE1H24, RPSE1H57, RPSE2H46
			RPS50H4EG, RPS50H6EG, RPS50AHSV, PPRPS25H4
CXP-2	-	RSS4	-
CXW Series - Rubber Supports, Widebody Base (Page 3)			
C-PORT	Dura-Block (B-Line)	Miro	Erico
CXW12	-	M8-UFS	-
CXW24	-	-	-
CXW36	-	-	-
C Series - Rubber Supports with 7/8" High Galvanized Steel Channel (Page 2)			
C-PORT	Dura-Block (B-Line)	Miro	Erico
C5	DB5	1.5	-
C10	DB10	2.5-Conduit Support-2	RPS360400, 360400
C20	DB20	-	RPS360403, 360403
C30	DB30	-	-
C40	DB40	-	-
C48	DB48	-	-
C5 & C6 Series - Rubber Supports with 1 5/8" High Galvanized Steel Channel (Page 2)			
C-PORT	Dura-Block (B-Line)	Miro	Erico
C510	-	2.5-Conduit Support-5	PPRPS25H6
C610	DB610	2.5-Conduit Support-7	RPS360401, 360401
C620	DB620	-	RPS360404, 360404
C630	DB630	-	-
C640	DB640	-	-
CW - Widebody Base with 1 5/8" High x 13/16" Galvanized Steel Channel (Page 3)			
C-PORT	Dura-Block (B-Line)	Miro	Erico
CW12	-	-	RPS360403
CW24	-	-	RPS600T2
CW36	-	-	-
CW48	-	-	-
CW60	-	-	-
CW72	-	-	-

CGW - Widebody Base with 1 5/8" High x 13/16" Galvanized Steel Channel and Gasket (Page 4)			
C-PORT	Dura-Block (B-Line)	Miro	Erico
CGW12	-	-	-
CGW24	-	-	-
CGW36	-	-	-
CGW48	-	-	-
CE - Extension Series - Regular Base (Page 5)			
C-PORT	Dura-Block (B-Line)	Miro	Erico
CE10-8	DBE10-8	20-Base Strut-7, 2.5-Conduit Support-5 / 7	-
CE10-12	DBE10-12	2.5-Conduit Support-12	RPS360402, 360402
CEW - Extension Series - Widebody Base (Page 5)			
C-PORT	Dura-Block (B-Line)	Miro	Erico
CEW12-8	-	16-Base Strut-7	-
CEW12-12	-	16-Base Strut-12	-
CEW12-16	DBE10-16	16-Base Strut-12	RPS360405, 360405
CRM - Roller Series, Small Base (Page 6)			
C-PORT	Dura-Block (B-Line)	Miro	Erico
CRM	-	3-R-2	-
CR - Roller Series, Regular Base (Page 6)			
C-PORT	Dura-Block (B-Line)	Miro	Erico
CR10-3	DBR2-31/2	6-RAH-7	RPS360406, 360406
CR10-4	DBR4-6	4-R	-
CRE - Extended Roller Series, Regular Base (Page 7)			
C-PORT	Dura-Block (B-Line)	Miro	Erico
CRE10-8-3	DBR10-12	3-RAH-7	RPS360407, 360407
CRE10-8-4	DBR10-12	4-RAH-7	-
CRE10-12-3	DBR10-12	3-RAH-12	-
CREW - Extended Roller Series, Widebody Base (Page 7)			
C-PORT	Dura-Block (B-Line)	Miro	Erico
CREW12-12-3	-	-	-
CREW12-12-4	-	-	-
CREW12-12-6	-	6-RAH-12	360409
CREW12-16-3	-	5-RAH-7	-
CREW12-16-4	-	5-RAH-12	-
CREW12-16-6	-	-	RPS360409

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

MIFAB, Inc., 1321 West 119th Street, Chicago, Illinois 60643-5109, USA

All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.

Toll Free: 1-800-465-2736, Fax: 1-773-341-3049
 sales@mifab.com Canada Toll Free: 1-800-387-3880

CB - Bridge Support w/ two CX Supports & 1 5/8" High Galvanized Steel Channel (Page 8)

C-PORT	Dura-Block (B-Line)	Miro	Erico
CB10-28	DB10-28	-	-
CB10-36	DB10-36	-	-
CB10-42	DB10-42	-	-
CB10-50	DB10-50	-	-
CB10-60	DB10-60	-	-

CES - Bridge Support w/ two Medium Load Supports & 1 5/8" High Galv. Steel Channel (Page 8)

C-PORT	Dura-Block (B-Line)	Miro	Erico
CES10-1012	-	-	-
CES10-1024	-	-	-

CESW - Medium Load w/ two Widebody Supports, 1 5/8" High Galvanized Steel Channel (Page 9)

C-PORT	Dura-Block (B-Line)	Miro	Erico
CESW12-2424	-	2.5-SB-H	-
CESW12-3624	-	5-SB-H, 8-SB-H, 8-SB-HD	-
CESW12-4824	-	-	-

CESHW - Heavy Load Series w/ two Widebody Supports, 1 5/8" High Galvanized Steel Channel (Page 9)

C-PORT	Dura-Block (B-Line)	Miro	Erico
CESHW12-1624	-	-	-
CESHW12-1636	-	-	-

DSA10 - Duct Support Series, Regular Base (Page 10)

C-PORT	Dura-Block (B-Line)	Miro	Erico
DSA10-1831	-	4-DSA-12, 4-DSA-18	-
DSA10-3157	-	-	-
DSA10-57102	-	-	-

CC - Copper Piping Support (Page 13)

C-PORT	Dura-Block (B-Line)	Miro	Erico
CC10-18	-	-	RPS360422, RPS360423, 360422, 360423

DSAW - Duct Support Series, Widebody Base (Page 10)

C-PORT	Dura-Block (B-Line)	Miro	Erico
DSAW-1831	DB-DS Series	6-DSA, 6-DS	RPS360420, RPS360421, 360420, 360421
DSAW-3157	DB-DS Series	8-DSA	-
DSAW-57102	DB-DS Series	8-DS-SB	-

CS - 1 5/8" Steel Channel Series w/ 6" Adjustable, 1 7/8" x 1 7/8" Square Leg (Page 11)

C-PORT	Dura-Block (B-Line)	Miro	Erico
CS10	-	-	-
CS20	-	-	-
CS30	-	-	-
CS40	-	-	-
CS48	-	-	-

CZ - Seismic Series (Page 11)

C-PORT	Dura-Block (B-Line)	Miro	Erico
CZ10	-	-	-
CZ20	-	-	-
CZ30	-	-	-
CZ40	-	-	-

AP - Airport Support System (Page 12)

C-PORT	Dura-Block (B-Line)	Miro	Erico
AP6	-	-	-
AP24	-	-	RPS150T1
AP36	-	-	-

CP - Platform Series (Page 13)

C-PORT	Dura-Block (B-Line)	Miro	Erico
CP36-2436	-	-	-
CP36-2448	-	-	-
CP36-2472	-	-	-

CSE - Copper Tube and Steel Tube Pipe Support (Page 12)



C-PORT	Dura-Block (B-Line)	Miro	Erico
CSE5-10	DBM -1, DBM-2CT	-	-

Cush-A-Clamp (for C-PORT models C5, C10 to C48, C510 to C640, CGW, CE, CEW, CB, CES CESHW, CW and CZ Series) (Standard finish is zinc electroplate)

Single Piece Pipe Strap (for C-PORT models CXM, CXP, CXP-2 and CXW Series) (Standard finish is zinc electroplate)

Model #	Pipe Size	List Price, each	Box Qty
CLAMP.50	1/2"	\$1.45	100
CLAMP.75	3/4"	\$1.50	100
CLAMP1.00	1"	\$1.60	100
CLAMP1.25	1 1/4"	\$1.85	50
CLAMP1.50	1 1/2"	\$2.00	50
CLAMP2.00	2"	\$2.25	50
CLAMP2.50	2 1/2"	\$2.70	50
CLAMP3.00	3"	\$3.00	25
CLAMP3.50	3 1/2"	\$3.75	25
CLAMP4.00	4"	\$4.25	25
CLAMP5.00	5"	\$4.75	25
CLAMP6.00	6"	\$5.75	25

Model #	Pipe Size	List Price	Box Qty
STRAP.50	1/2"	\$3.75	25
STRAP.75	3/4"	\$3.75	25
STRAP1.00	1"	\$4.25	25
STRAP1.25	1 1/4"	\$4.60	25
STRAP1.50	1 1/2"	\$4.85	25
STRAP2.00	2"	\$10.25	25
STRAP2.50	2 1/2"	\$10.75	25
STRAP3.00	3"	\$12.00	25
STRAP3.50	3 1/2"	\$12.85	10
STRAP4.00	4"	\$13.50	10
STRAP5.00	5"	\$18.50	bulk
STRAP6.00	6"	\$23.25	bulk



Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

TERMS AND WARRANTIES

WHOLESALE DISCOUNT:

Contact MIFAB or your local representative for your applicable discount structure.

FREIGHT ALLOWANCE: Ex Works, MIFAB's Chicago, Illinois Distribution Center or Manufacturer Representative's warehouse with full motor freight allowed on shipments of \$1,500.00 Net or more, within the continental U.S.A., except Alaska, Hawaii and Puerto Rico. MIFAB reserves the right to choose the carrier and route of shipment. Alaska: Ex Works, Seattle, WA. Hawaii: Freight allowed on shipments of \$1,500.00 more only when shipped from West Coast, U.S. Puerto Rico: Ex Works, Miami, Florida. There is no allowance for United Parcel Service, Federal Express or Shipment by air service.

QUOTATION TERMS: List Price and discount protected for 45 days from bid and due date. Orders received within this period must be released for shipment within 90 days from date of purchase order, otherwise, prices will be those that are in effect at the time of shipment.

PAYMENT TERMS: 2% cash discount allowed to approved accounts if paid on or before the 10th of the following month. Invoices not paid 30 days after invoice date are subject to a monthly 1 1/2% service charge. Minimum invoice amount - \$50 Net. Confirmed irrevocable letter of credit or payment in advance required for accounts without an established credit line.

RETURNED GOODS RESTOCKING CHARGE: Standard product may be returned within a year period only with written permission of Seller. All products in catalog are not considered Standard. Standard product to be determined by Seller. Returned goods are subject to 25% restocking charge, plus cost of reconditioning, if necessary, to make material saleable. Transportation charges must be paid by buyer. Credit allowance will be in the form of merchandise credit only-not cash credit which must be used within 12 months of the date of issue. The value of a return must total \$100.00 to qualify for credit allowance. Galvanized material will be credited at value of cast iron, and chrome plated at value of nickel bronze. No credit will be allowed for auxiliary tappings, discontinued, or made to order items. The letters SP following an item in the acknowledgment of a purchase order indicates that the item has been made especially for the job and is not subject to return, modification or cancellation.

LIMITED WARRANTY: MIFAB warrants each product against defects in material and workmanship for a period of one year from the date of original shipment. In event of such defects within the warranty period, MIFAB will, at its option, replace or recondition the product without charge. This shall constitute the exclusive remedy for breach of warranty, and MIFAB shall not be responsible for any incidental or consequential damages including, without limitation, damages or other costs resulting from labor charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, chemicals, or any other circumstances over which MIFAB has no control. This warranty shall be invalidated by any abuse, misuse, misapplication or improper installation of the product.

MIFAB MAKES NO OTHER WARRANTIES EXPRESSED OR IMPLIED AS PROVIDED IN THIS LIMITED WARRANTY.

ILLUSTRATIONS OR TYPICAL INSTALLATIONS: The typical installations for various products in each product found in each section are intended to illustrate the products and their options. Under no circumstances are they to be construed as recommended installation procedures. Consult local codes and project specifications for proper installation instructions.

NOTE: Prices and terms are subject to change without notice and supersede all previous quotations. The right is reserved to change or modify product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to product previously or subsequently sold. Contact MIFAB for any clarification.

All sales subject to MIFAB's Terms and Warranties.

CONTENTS © MIFAB INC. 2012

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.

MIFAB, Inc., 1321 West 119th Street, Chicago, Illinois 60643-5109, USA

All sales subject to MIFAB's Terms and Warranties. Please refer to inside front cover.


Toll Free: 1-800-465-2736, Fax: 1-773-341-3049
sales@mifab.com Canada Toll Free: 1-800-387-3880



Air Conditioning Support

Contributes to LEED credit*
*In the material and resources category


 **MADE FROM 100% RECYCLED TIRES**

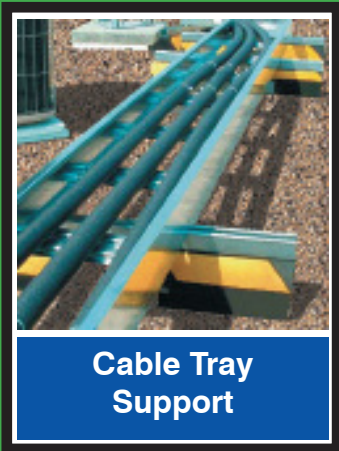


Cable Tray Support

Extends Roof Life

Dampens Vibrations

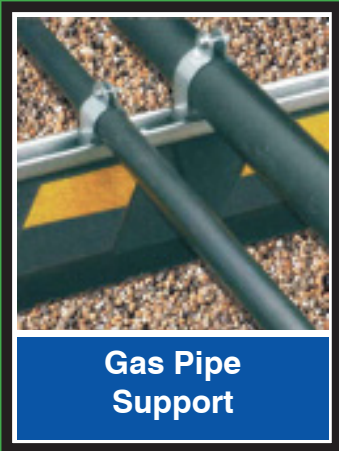

Gas Pipe Support

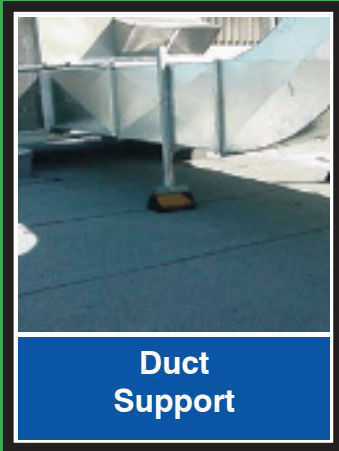

Duct Support

Curb Replacement

The recycled tire composition of C-Port is economical, environmentally safe and will not deteriorate in time.

C-Port can be used on any roof membrane; shingles, modified, metal, single-ply or built up, with no additional padding required.



Extended Height Pipe Support



Platform Support

Adaptable to any Roof Pitch.

YOUR ROOFTOP SUPPORT SOLUTION

C-Port... Innovative, economical support systems for gas and refrigeration pipes, electrical conduit, HVAC and platform systems.